

# Kaadas

KD-S500




FPC FINGERPRINT



AUTOMATIC LOCKING



DOUBLE LOCK FUNCTION



WRONG ENTRY ALARM




**INSTALLATION**  
BY CERTIFIED INSTALLER

**2 YEARS WARRANTY**

**YOUR DIGITAL LOCK SPECIALIST**

## Kaadas S500

LEVER SMART LOCK

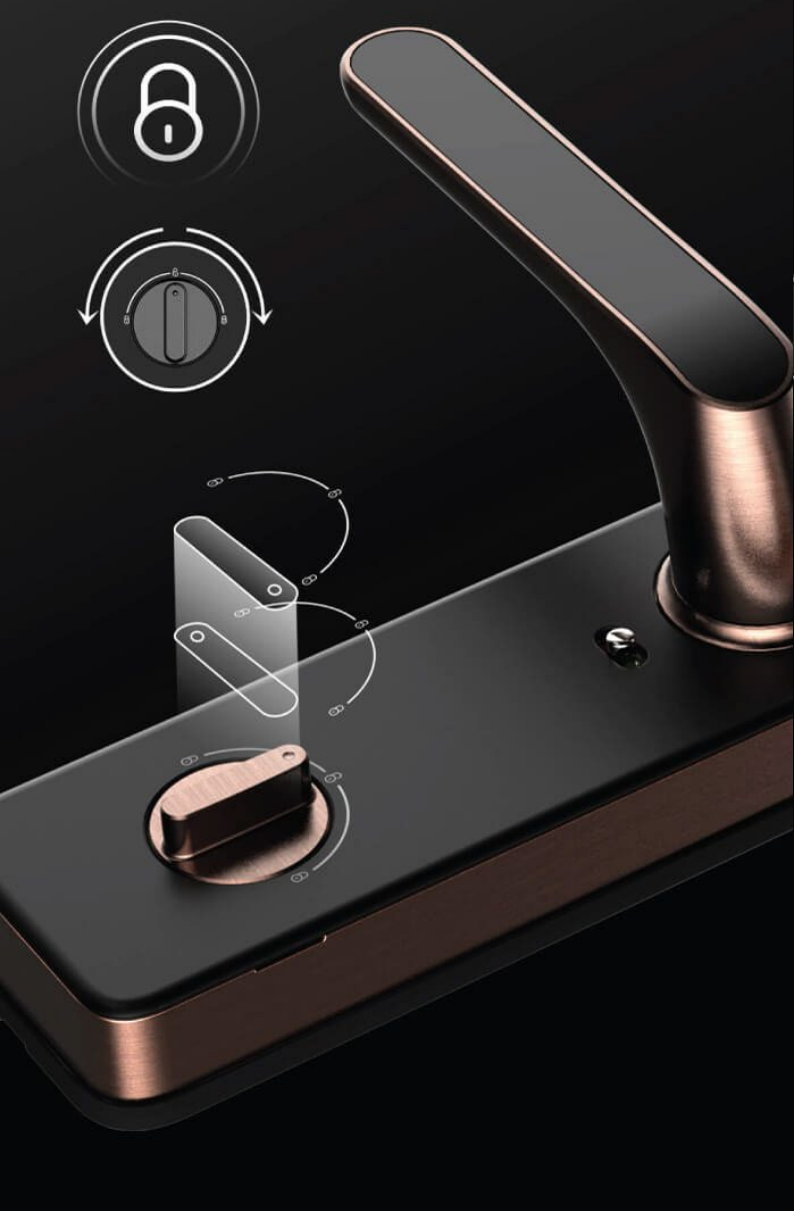


Double Lock from Inside



Safe Handle



Wrong-entry Alarm

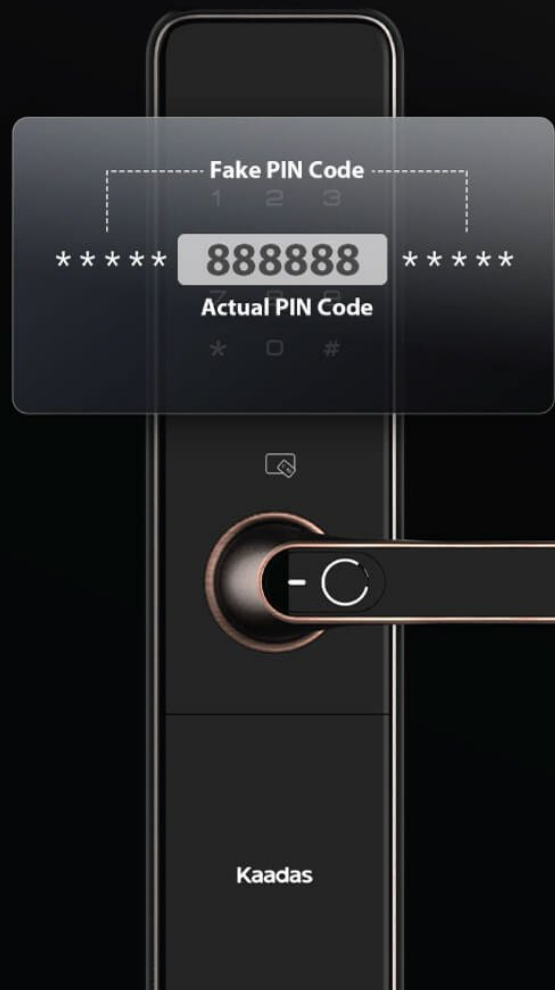


Fake PIN Code



Administrate Lock via APP



Emergency Power Supply

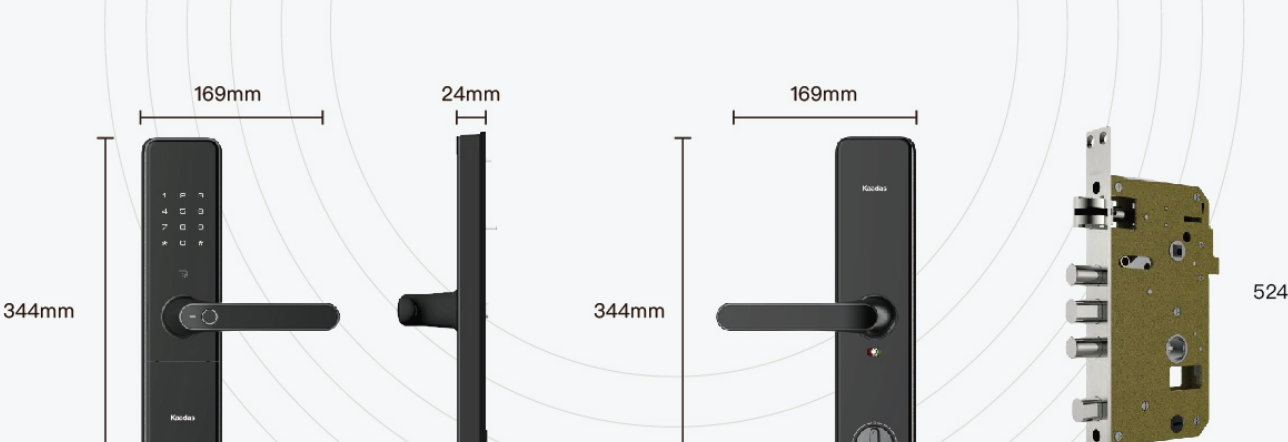


### Security Functions

Privacy Mode | Fake Pin Code | Safe Handle

### Alarming/Indication

Low Voltage | Wrong-Entry Alarming

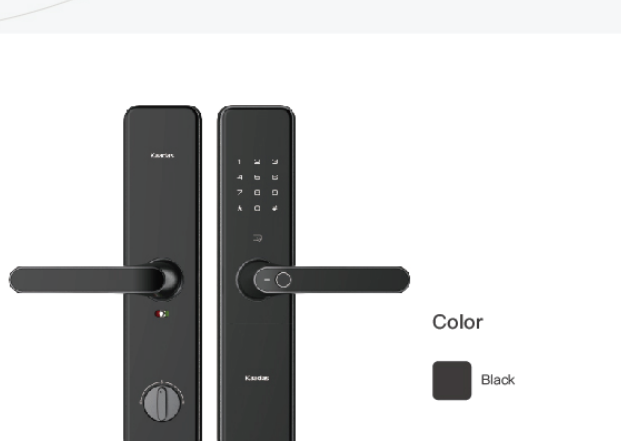

S500-C

### Product Specification

Main Material	Aluminum Alloy	Keypad Type	Touchpad
Mortise Type	524	Code Length	6-12 Digits
Stainless Steel Deadbolt	Yes	Code Capacity	11 (1 Master Code; 10 User Codes)
Vertical Rods	No	Working Voltage	DC 6V
Voice Guide	Yes	Battery	4 AA Alkaline Batteries
Handing	Universal	Working Temperature (°C)	-20~60°C
Emergency Cylinder	Super Grade B	Emergency Power	5V Micro USB
Fingerprint Sensor	Semiconductor	RH (%)	20-90
Fingerprint Capacity	100	IoT Connection	Optional
Card Type	Mifare/13.56MHz	Door Category	Wooden, Anti-burglary Door, Steel
Card Capacity	100	Door Thickness (mm)	38-120